

# AN INVESTIGATION ON REMOTE CONTROLLED TANK USING SENSORS FOR DEFENSE APPLICATIONS

**\*Dr. S.R.BOSELIN PRABHU, \*\* Dr. E.GAJENDRAN**

*\*Assistant Professor, Department of Electronics and Communication Engineering,  
SVS College of Engineering, Coimbatore, India.*

*\*\*Professor, Department of Information Technology,  
St.Martin"s Engineering College, Hyderabad.*

---

## ABSTRACT

*Most of the equipments used in combat are designed by keeping this in mind. When tank designers come up with a tank with better armor, ammunition designers come up with much better solution to destroy the tank. To tackle these tank designers increased the weight which further makes the tank a sitting duck to the enemy fire. The only solution to this problem is to reduce the weight by reducing the armor, but this will put the soldiers in trouble. So the better solution will be removing both the soldiers and armor from the tank. Thus the concept of remote controlled main battle tank arises and its operational requirements and issues are discussed here.*

**Keywords-***Electronic sight, CCD, FLIR, Fire control computer, artificial intelligence.*

## I.INTRODUCTION

A tank fired or artillery shells projectile may have a maximum range of 3000 meters, but a self-guided shells can reach an effective distance of 8000 meters approx., and the added advantage is the course can be changed during the mid-course prior to the target, which shows the advancement in ammunition technology. Our main objective is to save the life of our well trained soldier. Because a well-trained soldier is more important than a million dollar equipment. In this paper we have discussed a concept of operating weapon systems like main battle tanks (MBT), artillery guns remotely to improve the survivability and lethality. But we have discussed operating a MBT as our prime objective. Conventional turret of any MBT requires large area over the chassis which also weights more than two tons [9]. The main reason for such weight of the turret is it has to accommodate two operators and it has to be armored with a thick one inch steal which puts some added weight. Because from the beginning of tank design protection of soldiers life has given more priority than the platform survivability [9]. The turret is the most common point of attack, because it's the weakest point compared to any point on the MBT. To

accommodate a heavy turret vehicle with wider chassis is required which will increase the chance of detection and make it more vulnerable to enemy fire [1]. So the best solution in my point of view is to remove the soldiers from the turret and place them far away from the battle space, i.e., take control of the tank remotely.

Lighter weight- which helps reduce total station weight by 50% and improves platform stability by placing vehicles center of gravity centered and lowered. Ammunition capacity- eliminating soldier will provide extra space to store ammunitions. Profile-reduced size will reduce the chance of detection and can easily suppress enemy fire. Cost reduction- the safety of soldier cost more than the platform and it is not necessary in this concept. Power consumption-reduced weight needs reduced power to drive the turret.

## II. CONCEPTUAL VIEW

For the above mentioned control around four crew members are required and improper tank design will put their life under threat. No tank design can be said improper, because there was always a healthy competition between the tank designers and the ammunition designers. When designers come with a new tank, ammunition experts come with much better rounds to tear down the tanks [9-12]. To answer the question of the ammunition designers, tank designers added extra armor to their tanks, increases weight which cause more problem in rapidity and maneuverability. Only solution for this long lasting competition is to remotely operate these tanks, and we don't need to worry about armor. The block diagram shows how our system functions [13-17].

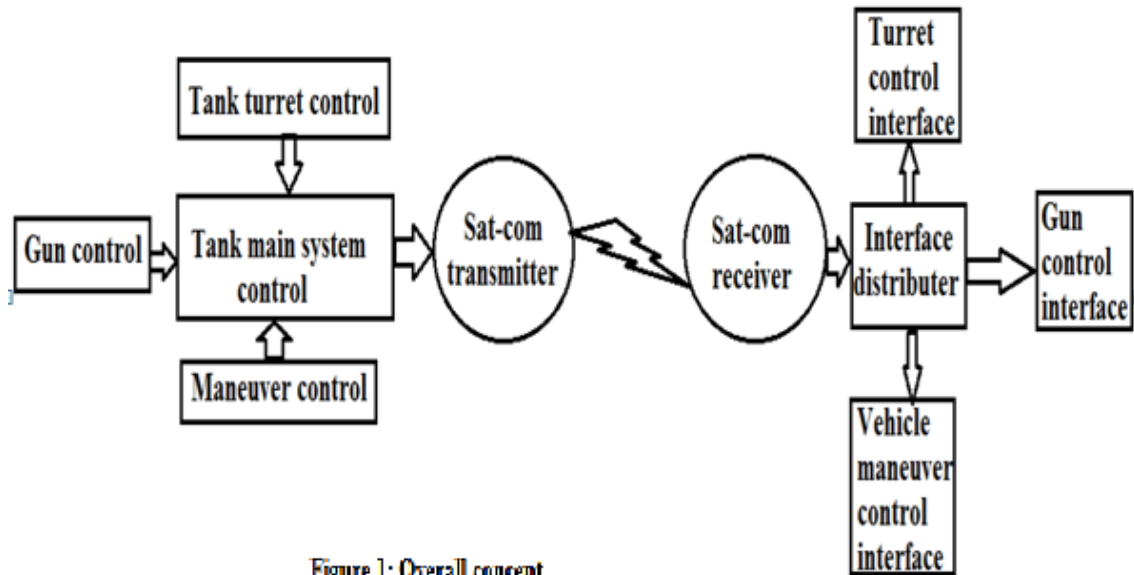


Figure 1: Overall concept

One of the best ways to evade from enemy fire was speed. Speed kills, but in the battle field speed saves our life, kill enemy and vice versa. The speed and range of maneuverability is more important for any MBT in any conflict zone. Driver control consist of controls to help the tank move Forward, backward, left as well as right. While controlling the tank remotely the delay in signal transmission and reaction time of the hardware in weapon system must be minimized for effective real-time control. The below figure shows the proven remote controlled vehicle which can be used during combat.

These sort of remote controlled weapon systems carry effective sensors which provide real-time intelligence. With advanced display techniques and virtualization we can make our solders feel they are in the battle, but they are not really. These type of weapons systems carry some array of sensors like Forward Looking Infra-Red (FLIR), day and night optics like color CCD, InSb cooled night vision cameras, laser range finders, etc., [7]. These sort of sensors helps in effective control of vehicle remotely which helps to attain full potential.

The turret consist of servo motor system which is controlled by the on-board computer (in case of remote control), where the instructions for the computer is sent from the user interface control located far away from the field [7]. To target a point target selected by the operator, the coordinate data are sent from the user interface consol to the on-board computer, which drives the turret accordingly. Once the target is within the range of the gun, gunner can pull the trigger remotely. To track a moving target, operator first selects a target, the target information are

continuously updated to the control console and the gun position is updated and guided to point on target. The system keeps track on moving target. The servo motors are controlled by digital pins of the on board computer, using PWM to control the movement of servos [18-21].

The on board computer is the main controller for the positioning of the turret and helps the gunner to take the shot [7, 22]. It acts as the onboard master controller for connecting all the individual components and make them work synchronized. Main function is to control the weapon station via remote commands.

For a system with servo motors, the controller has to provide PWM signals for at least three motors, for proper positioning of the turret and to aim the main gun [4, 23-26]. Wired communication protocols like CAN would be aided to communicate with other systems with in the remote station. Because it is very important that the reaction time between targeting and firing must be as small as possible. System for such operational capability must requires clock source of 16 KHz and above.

The gunner has to keep in mind that other than the force of the projectile many other external factors also influence the projectile. They are drag, gravity, wind direction and even the moisture content of the operational atmosphere [2-5]. The below figure shows the various force acting on a projectile.

So the gunner must have some sound knowledge about the aerodynamic factors. But human approach is not appreciable for scenarios like moving targets. In an instance if the light ray (eye sight) bends, i.e., if the gunners view is off course because of environmental parameters the gunner will target and shoots at the ghost target. Figure shows how bending light ray, i.e., gunners primary view affect the shoot. Other than this the stability of the gun also affects the performance to its worst. For better performance the gun has to be stabilized in two axis. The reason for two axis control is provided in the next figure. Here we go with Fire Control Computer (FCC). FCC calculates all these parameters affecting projectile and correct the course accordingly. Probability of first hit not only depends on the projectile course correction. It also depends on the velocity of the vehicle and the tilt with respect to surface. Fire control computer (FCC): FCC is nothing but a processor which considers all the possible factors which affects the hit probability of the projectile and aims the gun accordingly. It consist of some array of sensors which provides the input to the computer to solve complex mathematical relation and the answer is effected as the performance of the weapon system [7]. Below figure shows how a ballistic fire control computer looks like.

In present FCC the data is fed to a system by the soldier who is present inside the weapons system itself. In case if the system or the system operator is eliminated, the whole weapons

system can not function and become ineffective [6]. It also cost the life of the soldier. Artificial intelligence or automatic thread elimination may provide a solution. But in military particularly under complex weapon system use of AI is limited. It acts as the heart of the system. FCC depends on every individual sensor units and each sensor units reports to the FCC at a rate of fifty four times per seconds [7]. Some of the primary systems which reports to the FCC are as follow.

Electronic sights are nothing but CCD cameras which provide input feeds to an LCD display. It had replaced old mechanical sight systems. The function of this sight system is just to display what is looks. It works at infrared wave band of eight to fourteen micrometer. Instead of displaying the video optical feed, it displays the heat signature of the target [8]. Because well camouflaged targets are more difficult to find in the photograph, but they can't hide their heat signature easily. It is also known as Target Acquisition and Designation System (TADS) It consist of an array of sensors includes FLIR, CCD, day night optics, and night television system, mostly provides visual information on the target. FCS depends on various sensor inputs to function, sensor includes temperature sensor, used to calculate charge (projectile) temperature, barrel temperature, environmental sensor [27-29], meteorological sensor, used to calculate wind direction, velocity, humidity sensor, pressure sensor and a compass. In addition to that CANT sensor provide the tilt level of the MBT which are all used to find firing solution. Gun resolver provides the angle to which the barrel had bent which determines the path of the projectile. LASER range finder provides the distance to the target from the tank [19-26].

Upon all the whole system has to work under a synchronized clock pulse. Tanks velocity may vary with instance and the tilt angle varies depending on the terrain. These variations will affect the performance badly and they have to monitored continuously to attain first round hit probability. In other instance the target range may increase or decrease which means they keep on vary and they have to tracked simultaneously to improve efficiency [5].

All the parameters are reporting to the ballistic fire control computer which displays all the tactical information's which are displayed to the control consol which is an interactive LCD touch based control which is located inside the crew compartment. Any shell burst inside the compartment will affect the crew. This block will explain clearly. The solution is to move the crew far away from the battle field. This will save our soldiers. The block diagram clearly explains how remote operation works. Based on the displayed information the operator will provide the control signals remotely. These signals are transmitted remotely to the main battle tank. Fire control computer located within the battle tank receives the control information and apply those to the respective ports of the computer which drives the tank, eliminating the risk of the solders.

### III. CONCLUSION

Due to its reduced size the stealthiest platform can be obtained. Reduction in weight will help to make the platform to maneuver with ease in tough terrains. Only problem we found will be the communication link. The link must have high bandwidth which can support real time transmission of audio, video, command signals to the base station. Reduced size will also help in easy transport via airlift and reduced deployment time. The hardware used in the weapon station and control centers must have to work with real time schedules and with less delay. The processors must have the ability to multitask several events simultaneously and with better performance results. In future the same will be implemented in hardware and real time issues will be resolved.

### REFERENCES

- [1] Thiago Teixeir, Gershon Dublon, "A survey of human-sensing: methods for detecting presence, count, location, track, and identity", ACM Computing Surveys, Vol. V, No. N, 20YY, Pages 1-77.
- [2] Michael Winkler, Klaus-Dieter Tuchs, Kester Hughes, and Graeme Barclay. "Theoretical and practical aspects of military wireless sensor networks", Journal of Telecommunications and Information Technology, pp. 37-45.
- [3] K. Akkaya and M. Younis, "A survey on routing protocols for wire-less sensor networks", Ad-hoc Netw., no. 3, pp. 325-249, 2005.
- [4] Al-Karaki and Kamal, "Routing techniques in wireless sensor networks: a survey", IEEE Wirel. Commun., vol. 11, iss.6, pp. 6-28, 2004.
- [5] Hamid Ali Abed Al-Asadi, "Temperature dependence of the lasing characteristics of vertical cavity surface emitting lasers," Engineering Journal of Technology University, Vol. 145, 1994.
- [6] Boselin Prabhu S.R. and Sophia S., "Environmental monitoring and greenhouse control by distributed sensor Network", International Journal of Advanced Networking and Applications, 5(5), 2014.
- [7] Boselin Prabhu S.R. and Sophia S., "Greenhouse control using wireless sensor network", Scholars Journal of Engineering and Technology, 2(4), 2014.

[8] Hamid Ali Abed Al-Asadi, "Temperature dependence of the noise characteristics of Multiisecton semiconductor lasers," Science Journal, vol. 7, No. 3, 2001.

[9] Hamid Ali Abed Al-Asadi, "Linewidth characteristics of vertical cavity surface emitting lasers due to external optical feedback," Science Journal, vol. 8, 2001.

[10] Boselin Prabhu S.R. and Sophia S., 'Modern cluster integration of advanced weapon system and wireless sensor based combat system', Scholars Journal of Engineering and Technology, 2(6A), 2014.

[11] Boselin Prabhu S.R. and Sophia S., 'A review of efficient information delivery and clustering for drip irrigation management using WSN', International Journal of Computer Science and Business Informatics, 14(3), 2014.

[12] Hamid Ali Abed Al-Asadi, "Linewidth characteristics of vertical cavity surface emitting lasers due to external optical feedback," Science Journal, vol. 8, 2002.

[13] Hamid Ali Abed Al-Asadi, "Theoretical investigation of spectral linewidth properties of double fused 1.3 um MQW-VCA in reflection and transition modes," Tikrit Journal for Pure Science, vol. 8, No. 2, 2002.

[14] Boselin Prabhu S.R. and Sophia S., 'Mobility assisted dynamic routing for mobile wireless sensor networks', International Journal of Advanced Information Technology, 3(3), 2013.

[15] Boselin Prabhu S.R. and Sophia S., 'A review of energy efficient clustering algorithm for connecting wireless sensor network fields', International Journal of Engineering Research and Technology, 2(4), 2013.

[16] Hamid Ali Abed Al-Asadi, "Vertical cavity amplifiers and its cavity length dependence the saturation power and quantum efficiency," Tikrit Journal of Pure Science, vol. 9, No. 2, 2003.

[17] Hamid Ali Abed Al-Asadi, "Effects of pump recycling technique on stimulated Brillouin scattering threshold: A theoretical model," Optics. Express, Vol. 18, No. 21, pp. 22339-22347 Impact factor: 3.88, 2010.

[18] Boselin Prabhu S.R. and Sophia S., 'Variable power energy efficient clustering for wireless sensor networks', Australian Journal of Basic and Applied Sciences, 7(7), 2013.

[19] Boselin Prabhu S.R. and Sophia S., 'Capacity based clustering model for dense wireless sensor networks', International Journal of Computer Science and Business Informatics, 5(1), 2013.

[20] Hamid Ali Abed Al-Asadi, "Brillouin Linewidth Characterization in Single Mode Large Effective Area Fiber through the Co-Pumped Technique," International Journal of Electronics, Computer and Communications Technologies (IJECCCT), Vol. 1(1), pp. 16-20, 2010.

[21] Boselin Prabhu S.R. and Sophia S., 'An integrated distributed clustering algorithm for dense WSNs', International Journal of Computer Science and Business Informatics, 8(1), 2013.

[22] Boselin Prabhu S.R. and Sophia S., 'A research on decentralized clustering algorithms for dense wireless sensor networks', International Journal of Computer Applications, 57(20), 2012.

[23] Hamid Ali Abed Al-Asadi, "Analytical study of nonlinear phase shift through stimulated Brillouin scattering in single mode fibre with pump power recycling technique," Volume 13 Number 10, Journal of Optics. Impact factor: 1.99, 2011.

[24] Boselin Prabhu S.R. and Sophia S., 'Hierarchical distributed clustering algorithm for energy efficient wireless sensor networks', International Journal of Research in Information Technology, 1(12), 2013.

[25] Boselin Prabhu S.R. and Sophia S., 'Real-world applications of distributed clustering mechanism in dense wireless sensor networks', International Journal of Computing Communications and Networking, 2(4), 2013.

[26] Hamid Ali Abed Al-Asadi, "Architectural Analysis of Multi-Agents Educational Model in Web-Learning Environments," Journal of Emerging Trends in Computing and Information Sciences, Vol. 3, No. 6, June 2012.

